


SRM2016 double-stage open Compressor

srmtecgroup.com/products/compressors/srm-2016/



SRM 2016 Series		
Model	SRM-2016MS	SRM-2016LM
Displacement @2960 rpm [m3/h]	1100 / 435	1200 / 435
Displacement @3600 rpm [m3/h]	1337 / 529	1544 / 529
Capacity Control	Step-less 10% - 100%	
Max. rpm	3600	
Vi Control	Manual / Auto / Fixed	
Vi adjustment range	2.0/3.5/5.0	
Rotation, onto compressor shaft	Counterclockwise when looking at the motor shaft	
Non-return valve suction side	Optional	
Suction inlet diameter [mm]	DN 150	DN 150
Discharge outlet diameter [mm]	DN 80	DN 80
Eco connection [mm]	DN 40	DN 40
Design pressure	28 bar	
Length [mm]	2031	2109
Width [mm]	523	525
Height [mm]	573	599
Weight [kg]		

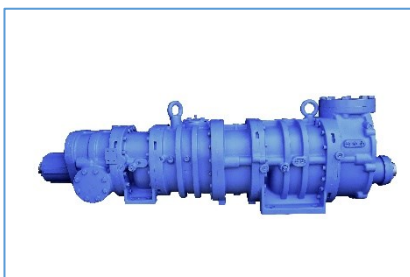